



Every home can benefit from proper ventilation. Honeywell's new Digital Bath Fan Control can operate a bath fan to meet ASHRAE 62.2 ventilation standards, allowing you to offer increased ventilation control that is smart, affordable and efficient.


Digital Bath Fan Control

SMART, AFFORDABLE, EFFICIENT VENTILATION CONTROL

Easy To Install – Installs in place of a normal switch.

Simple Programming – Manually turn fan on/off or program to run at certain times of day for increased energy efficiency and convenience.

Timer Option – Can run in timer mode up to 60 minutes in 5-minute increments.

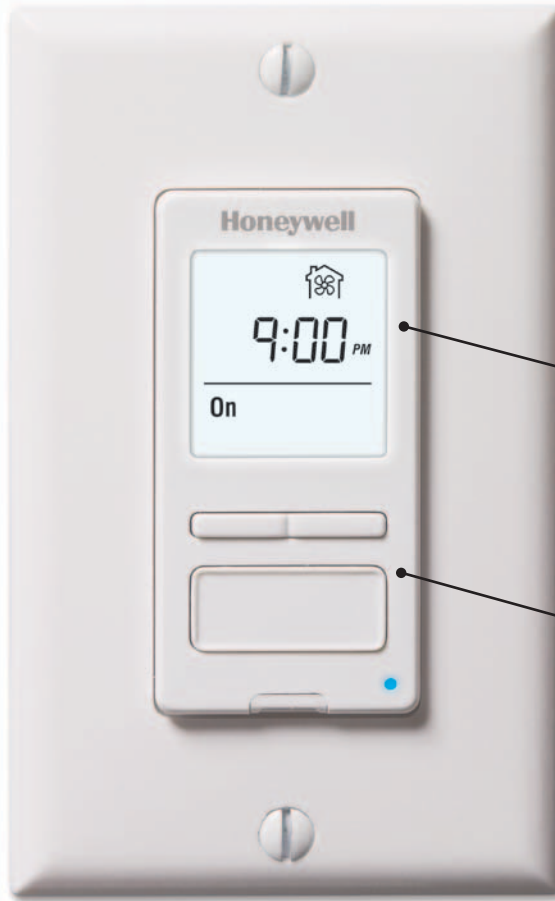

Meets ASHRAE 62.2 Ventilation Standard – Required or recommended in most states and provinces for new construction or whenever a permit is required.

Convenient Display – Easy-to-see backlit display shows current time to keep you on schedule when getting ready.

Color Options – Available in Premier White® (featured) or Biscuit (shown right).



| Part Number | Product Description |
|-------------|-------------------------------------------|
| HVC0001 | Digital Bath Fan Control – Premier White® |
| HVC0002 | Digital Bath Fan Control – Biscuit |

| ASHRAE 62.2 CFM Sizing Chart | | | | | |
|-------------------------------|--------------------|-----|-----|-----|-----|
| Floor Area (ft ²) | Number of Bedrooms | | | | |
| | 0-1 | 2-3 | 4-5 | 6-7 | > 7 |
| < 1500 | 30 | 45 | 60 | 75 | 90 |
| 1501 - 3000 | 45 | 60 | 75 | 90 | 105 |
| 3001 - 4500 | 60 | 75 | 90 | 105 | 120 |
| 4501 - 6000 | 75 | 90 | 105 | 120 | 135 |
| 6001 - 7500 | 90 | 105 | 120 | 135 | 150 |
| > 7500 | 105 | 120 | 135 | 150 | 165 |

ANSI/ASHRAE STANDARD 62.2-2007 TABLE 4.1 A (I-P) Ventilation Air Requirements, cfm

Automation and Control Solutions

In the US:

Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422-3992

In Canada:

Honeywell Limited
35 Dynamic Drive
Toronto, Ontario M1V 4Z9

www.customer.honeywell.com

5-YEAR
LIMITED
WARRANTY

50-1331 GK
November 2010
© 2010 Honeywell International Inc.

Honeywell